

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E010BE-AEC

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.


Detail Specification: 10/28/2021

Page 1 of 9

AEC-Q200 Qualified Component

General Specifications

Part Number	2450AT42E010BE-AEC	
Frequency (MHz)	2400 - 2480	
Return Loss (dB)	EVB1*	EVB2*
	2.7 min.	3.5 min.
Peak Gain (dBi typ.)	-1.0 (YZ-V)	-1.0 (YZ-V)
Average Gain (dBi typ.)	-3.5 (YZ-V)	-5.0 (YZ-V)
Impedance (Ω)	50	
Power Capacity (W)	2 max. (CW)	
Reel Quantity (pcs./reel)	2,000	
Operating Temp	-40 to +125°C	
Recommended Storage Conditions and Period for unused Product on T&R	+5 to +35°C	
	Humidity 45 - 75% RH 18 months max.	

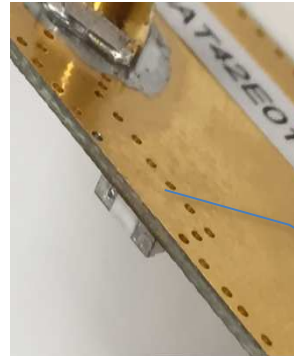

Zero Clearance!

Antenna mounts directly above or below the metal layer of PCB. No antenna clearance required ever again!

* Evaluation boards 1 and 2 are meant to demonstrate the difference in performance achievable with different substrate thicknesses.


This antenna was designed in mind for small coin cell, wearable, IoT, 2.4 BLE, 802.11, ISM, Zigbee, etc. applications in close-range networks where metal or a battery/display covers the entire length or side of the PCB or encasement must be present directly under the antenna and there's no room for usual/typical antenna metal clearance.

Part Number Explanation


P/N Suffix	Packing Style	Bulk (loose pcs.)	Suffix = S	E.g. 2450AT42E010BS-AEC
		T & R	Suffix = E	E.g. 2450AT42E010BE-AEC
	Evaluation Board 1	2450AT42E010B-EB1SMA (comes with 1 female SMA connector)		
	Evaluation Board 2	2450AT42E010B-EB2SMA (comes with 1 female SMA connector)		

Mechanical Specifications


	In	mm
L	0.197 ± 0.008	5.00 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.059 ± 0.008	1.50 ± 0.20
a	0.020 ± 0.008	0.50 ± 0.20
b	0.059 ± 0.008	1.50 ± 0.20
C	0.012 max	0.30 max



Top View




Side View



Bottom View

Terminal Configuration

1	Feeding Point
2	NC ¹
3	GND
4	GND



¹Make sure to have Pin 2 soldered to its PCB land pad but **not** connected to GND or input, it must be NC (or floating).

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna



P/N 2450AT42E010BE-AEC

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 2 of 9

Mounting Consideration 1: Evaluation Board 1 (Thickness = 1.5mm)

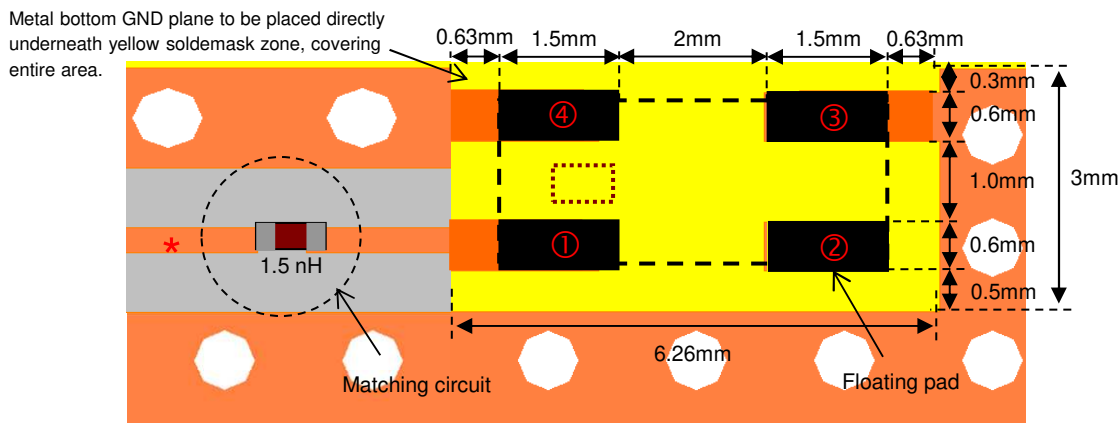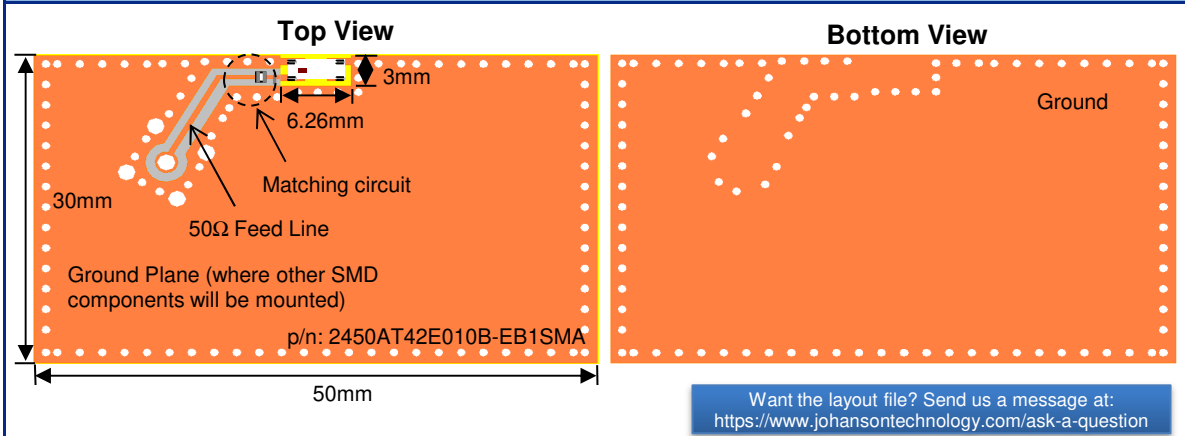

* Line width should be designed to match 50ohm characteristic impedance, depending on PCB material and thickness. A coplanar waveguide trace is recommended for best results.

For this particular antenna It is recommended that the designer leave available slots for the matching network, even if all slots won't be used, this will prepare the PCB for the unpredictable final mass production version of the matching circuit. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different.

To order a pre-tuned 50Ω EVB with a female SMA connector you see here Click here:

<https://www.johansontechnology.com/request-a-sample>

Reference p/n: 2450AT42E010B-EB1SMA

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna


P/N 2450AT42E010BE-AEC

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.


Detail Specification: 10/28/2021

Page 3 of 9

Mounting Consideration 1: Evaluation Board 2 (Thickness = 2.5mm)

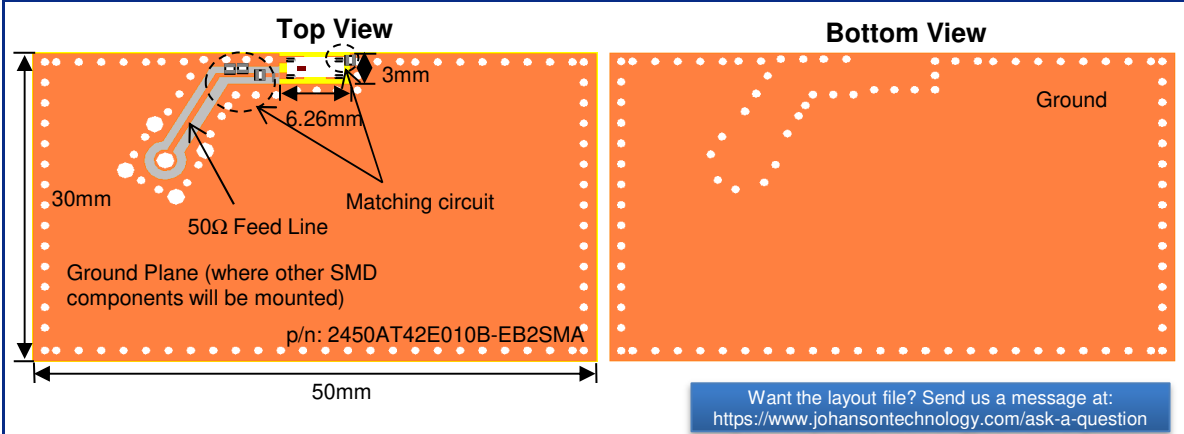

Metal bottom GND plane to be placed directly underneath yellow soldemask zone, covering entire area.

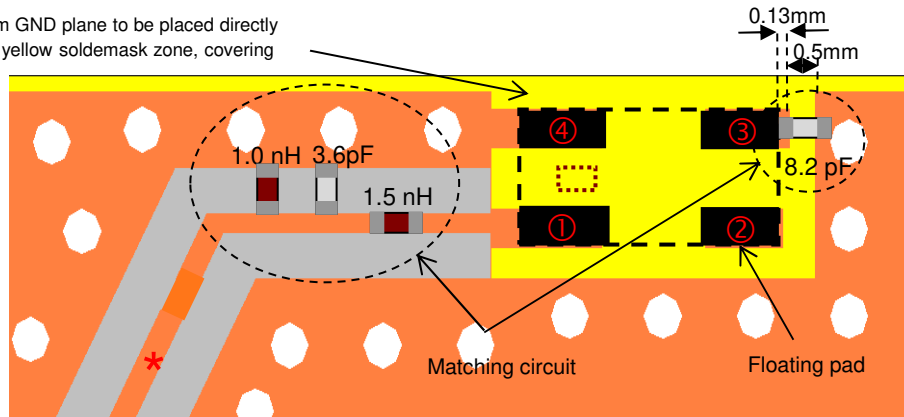

* Line width should be designed to match 50ohm characteristic impedance, depending on PCB material and thickness. A coplanar waveguide trace is recommended for best results.

For this particular antenna It is recommended that the designer leave available slots for the matching network, even if all slots won't be used, this will prepare the PCB for the unpredictable final mass production version of the matching circuit. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different.

To order a pre-tuned 50Ω EVB with a female SMA connector you see here Click here:

<https://www.johansontechnology.com/request-a-sample>

Reference p/n: 2450AT42E010B-EB2SMA

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E010BE-AEC

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.


Detail Specification: 10/28/2021

Page 4 of 9

Typical Electrical Characteristics (T=25 °C)

Evaluation Board 1 (Antenna Efficiency: 18%@ 2.4GHz ; 38%@2.44GHz ; 21%@2.48GHz)


Return Loss

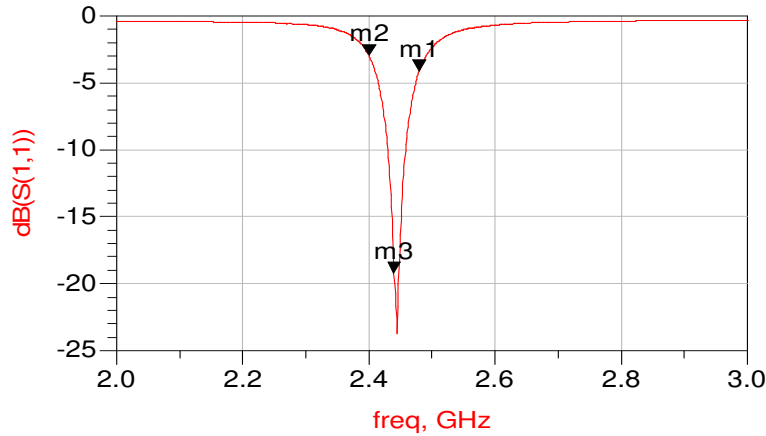

m2 freq=2.400GHz dB(S(1,1))=-2.951	m3 freq=2.440GHz dB(S(1,1))=-19.219	m1 freq=2.480GHz dB(S(1,1))=-4.100
--	---	--

Evaluation Board 2 (Antenna Efficiency: 27%@ 2.4GHz ; 42%@2.44GHz ; 27%@2.48GHz)

Return Loss

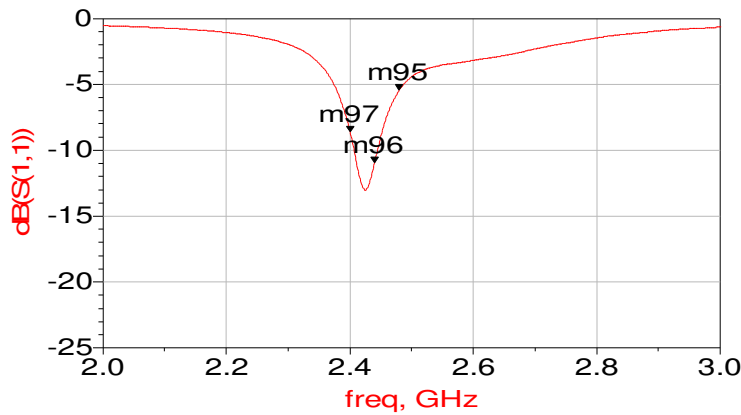

m97 freq=2.400GHz dB(S(1,1))=-8.572	m96 freq=2.440GHz dB(S(1,1))=-10.958	m95 freq=2.480GHz dB(S(1,1))=-5.426
---	--	---

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna


P/N 2450AT42E010BE-AEC

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 5 of 9

Typical Radiation Patterns @ 2.44GHz (T=25 °C)

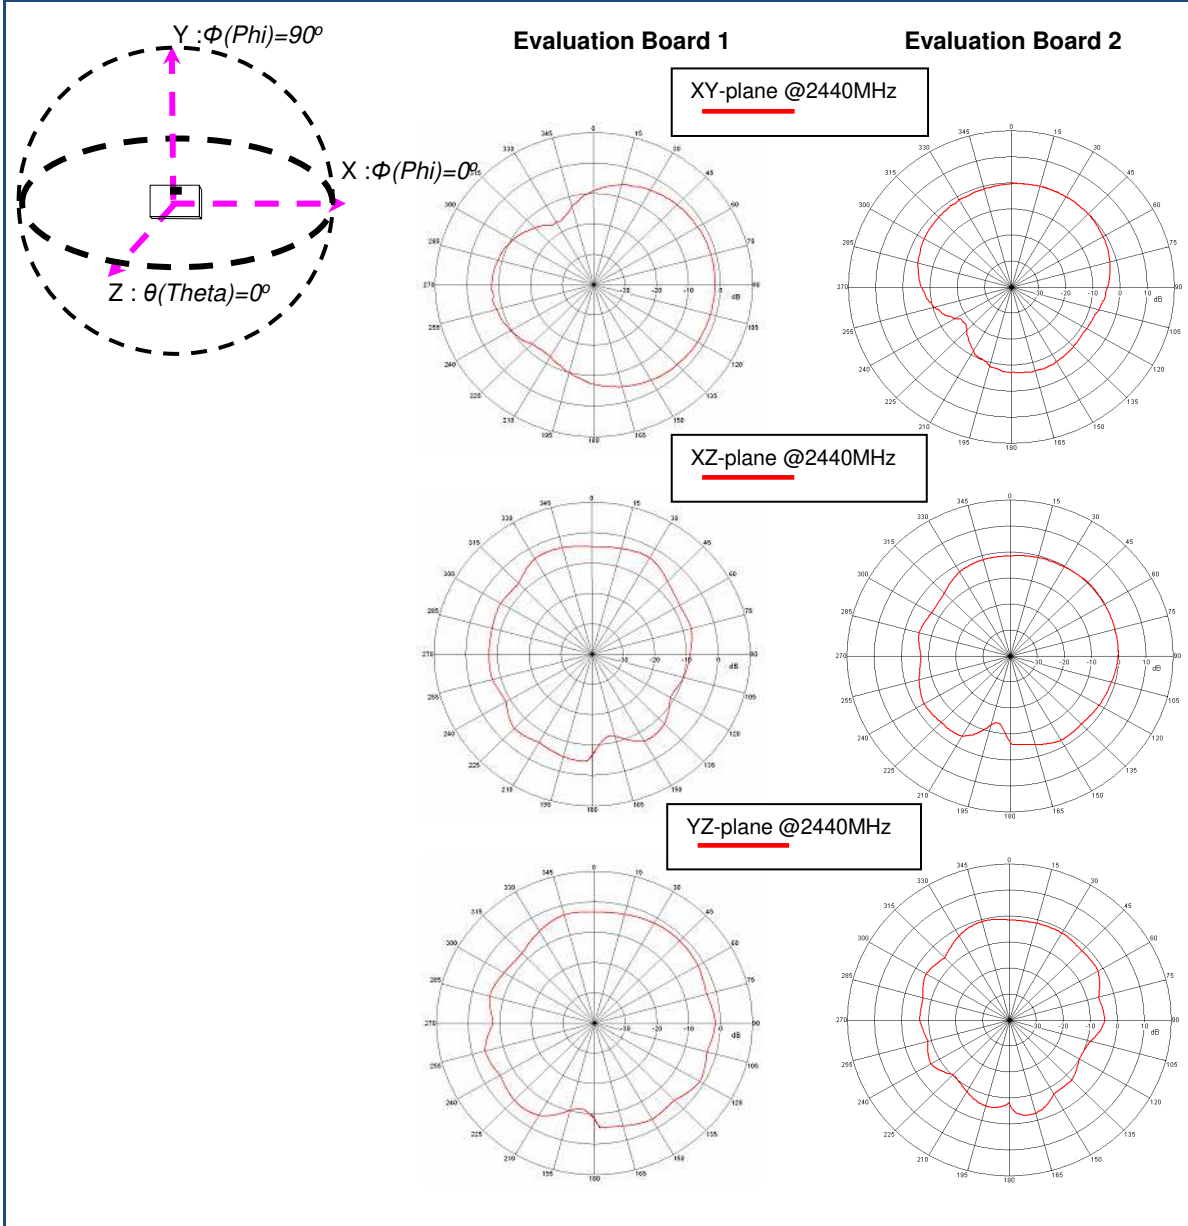

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E010BE-AEC


This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021


Page 6 of 9

Mounting Considerations 2 - Circular PCB Environments (coin cell type)

Top View

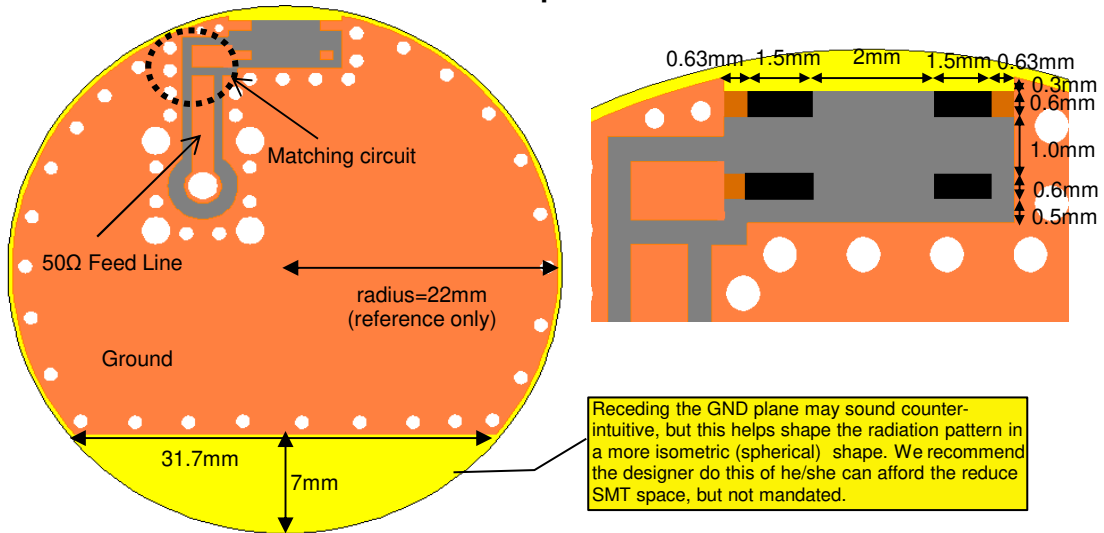

Bottom View

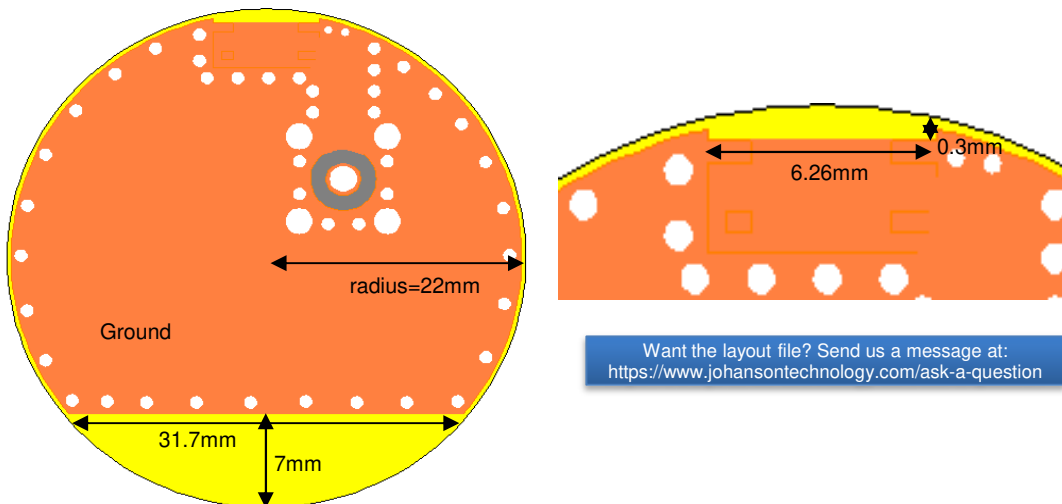

Note: There's no orderable EVB available for the above "Mounting Considerations 2" reference design

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E010BE-AEC


This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021


Page 7 of 9

Wider Tuning Example

By re-tuning our Evaluation Board 1, return loss can be improved over the bandwidth as a whole. An additional tuning element is placed between antenna pin 3 and GND.

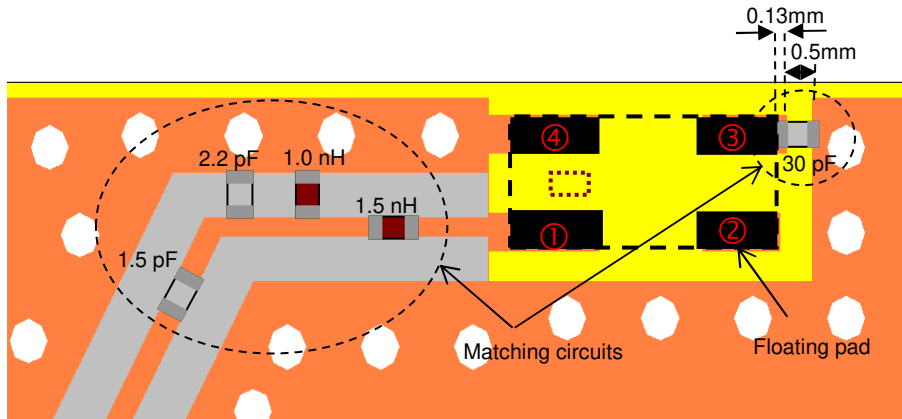

(Antenna Efficiency: 22%@ 2.4GHz ; 31%@2.44GHz ; 20%@2.48GHz)

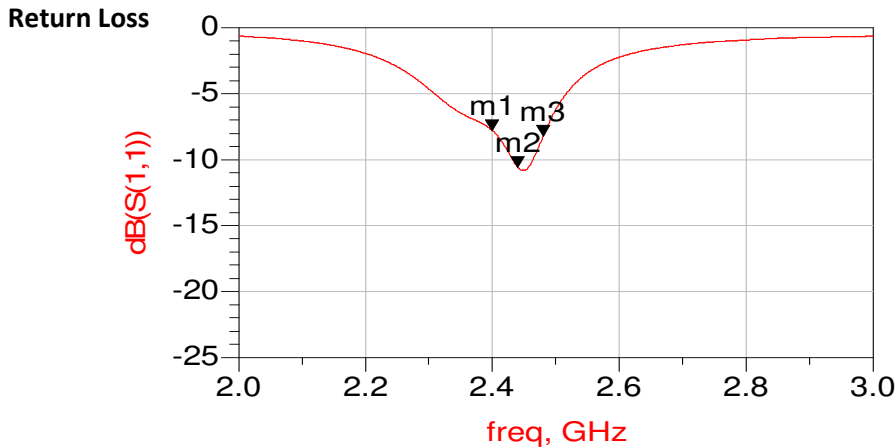

m1
freq=2.400GHz
dB(S(1,1))=-7.785

m2
freq=2.440GHz
dB(S(1,1))=-10.579

m3
freq=2.480GHz
dB(S(1,1))=-8.225

Note: This only serves as an example and is not an order-able evaluation board.

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E010BE-AEC

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.


Detail Specification: 10/28/2021

Page 8 of 9

How To Choose The Correct Antenna Variant

Since the antenna's efficiency is largely affected by the thickness of the PCB's substrate, we offer another variant of this antenna. This allows a more robust design to fit your PCB. The disparity between antenna variations are internal only; variations are identical in dimension and footprint-compatible.

Refer to the diagram below to understand what is meant by substrate thickness.

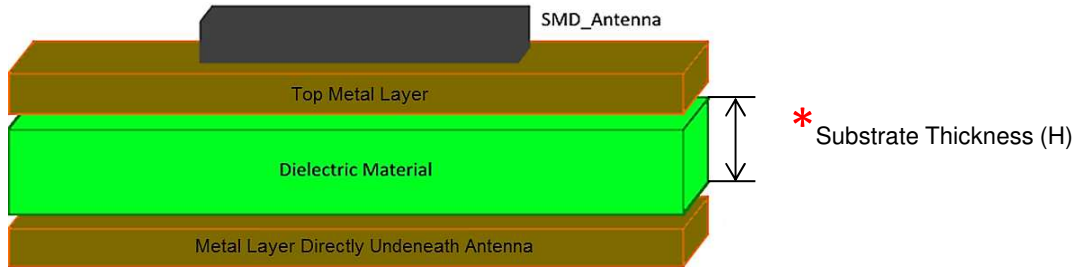

* For PCBs consisting of multiple layers, the thickness (H) is limited distance between the metal layer immediately below the antenna.

PCB Substrate Thickness	Recommended JTI PN
≤ 1.0mm	2450AT42E0100E-AEC
1.0mm - 2.0mm	2450AT42E010BE-AEC

Typical Efficiency Values @ 2.44GHz for various scenarios for a 30x50mm PCB

The following efficiency values represent performance on a 30x50mm EVB like on page 2. Please note that antenna efficiency varies widely with board layout, size and surroundings.

PCB Substrate Thickness (H)	Antenna Efficiency @ 2.44GHz	
	2450AT42E0100E-AEC	2450AT42E010BE-AEC
H = 0.12 mm	1.95%	1.02%
H = 0.7 mm	29.20%	9.30%
H = 1.5 mm	23.30%	38.00%
H = 2.5 mm	21.60%	42.00%

Note: "H" substrate thickness of <0.25mm(10mil) is not recommended. The component will still radiate however not optimally.

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E010BE-AEC

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 9 of 9

Antenna layout review, tuning, and characterization services

<https://www.johansontechnology.com/ipc-antenna-services>

More SMD Chip Antennas at:

<https://www.johansontechnology.com/antennas>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

Antenna layout and tuning techniques (How to obtain the new antenna matching values)

<https://www.johansontechnology.com/tuning>

Packaging information

<http://www.johansontechnology.com/tape-reel-packaging>

RoHS Compliance


<https://www.johansontechnology.com/rohs-compliance>

MSL Info

<https://www.johansontechnology.com/msl-rating>

P/N Explanation and Breakdown

<https://www.johansontechnology.com/ipc-pn-explained>



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 5.1

2021 Johanson Technology, Inc. All Rights Reserved