

High Frequency Ceramic Solutions


Mini GNSS 3dB Hybrid Coupler, SMD, EIA 0805 for GPS,
GLONASS, BEIDOU, GALILEO

P/N 1585CH15A0070

Detail Specification: 3/29/2019

Page 1 of 5

General Specifications	
Part Number	1585CH15A0070
Freq. Range (MHz)	1550 - 1620
Insertion Loss (dB)	3.3 ± 0.5
Return Loss (dB)	10 min.
Phase Balance	90° ± 3
Amplitude Balance (dB)	1.0 max.
Isolation (dB)	16 min.
Operating Temp. Range	-40°C to +85°C
Power Capacity (W)	3 max. (CW)
Recommended Storage Conditions for Unused Product on T&R	+5 to +35 °C Humidity 45 - 75%RH 18 months max.
Qty/Reel	4000pcs

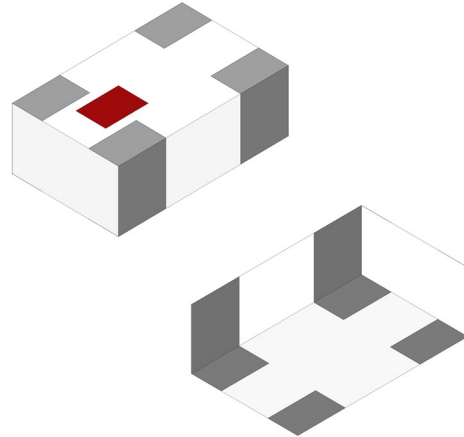

Part Number Explanation				
P/N Suffix	Packing Style	Bulk	Suffix = S	e.g. 1585CH15A0070S
		T & R	Suffix = E	e.g. 1585CH15A0070E
	Termination style	100% Tin	Suffix = None	e.g. 1585CH15A0070(S or E)
	Evaluation Board	1585CH15A0070-EB1SMA		

Mechanical Dimensions				
	In		mm	
L	0.079	± 0.004	2.00	± 0.10
W	0.049	± 0.004	1.25	± 0.10
T	0.028	± 0.004	0.70	± 0.10
a	0.022	± 0.010	0.56	± 0.25
b	0.014	± 0.006	0.35	± 0.15

<Bottom View>

<Side View>

Terminal Configuration	
1	Termination
2	Input
3	OUT2
4	OUT1

High Frequency Ceramic Solutions


Mini GNSS 3dB Hybrid Coupler, SMD, EIA 0805 for GPS,
GLONASS, BEIDOU, GALILEO

P/N 1585CH15A0070

Detail Specification: 3/29/2019


Page 2 of 5

Mounting Consideration

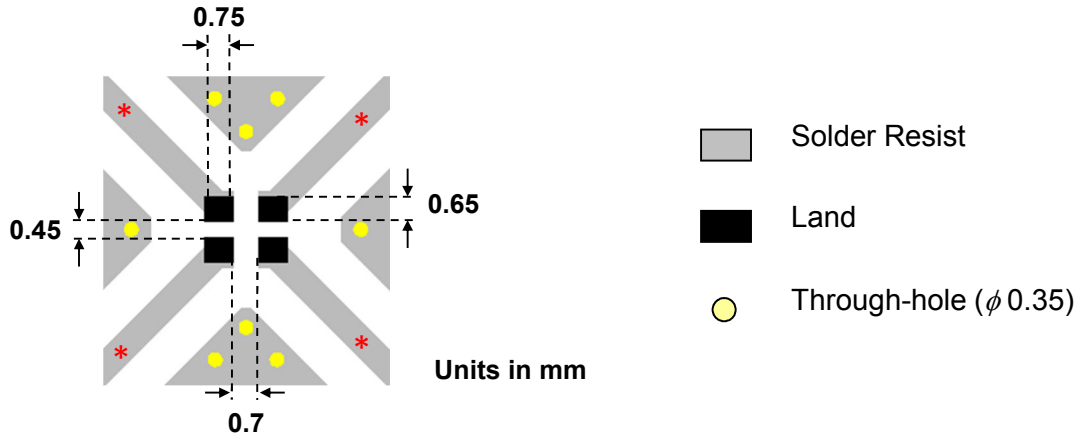

* Line width should be designed to match 50W characteristic impedance, depending on PCB material and thickness.

Measuring Diagram

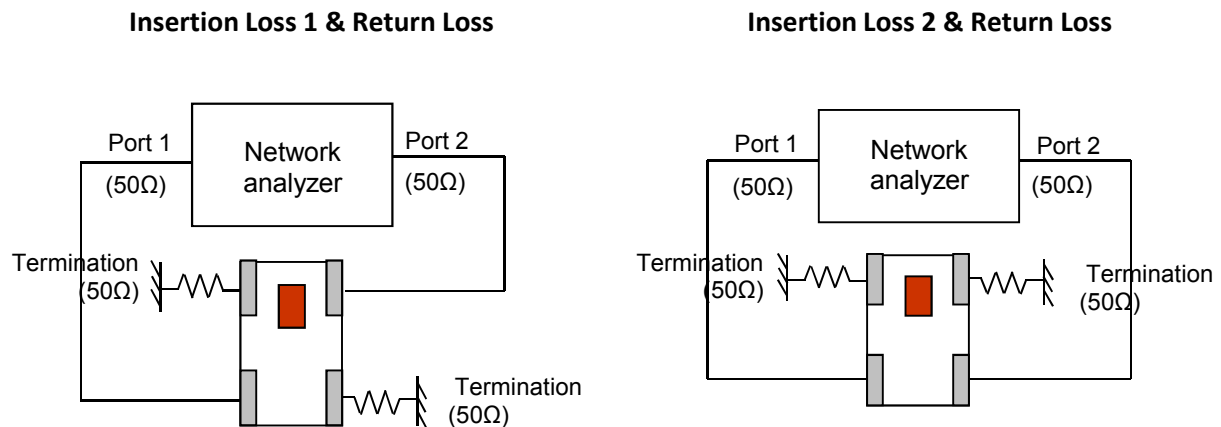

The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions

Mini GNSS 3dB Hybrid Coupler, SMD, EIA 0805 for GPS,
GLONASS, BEIDOU, GALILEO


P/N 1585CH15A0070

Detail Specification: 3/29/2019


Page 3 of 5

Electrical Characteristics (T=25 °C)

Insertion Loss 1 & 2

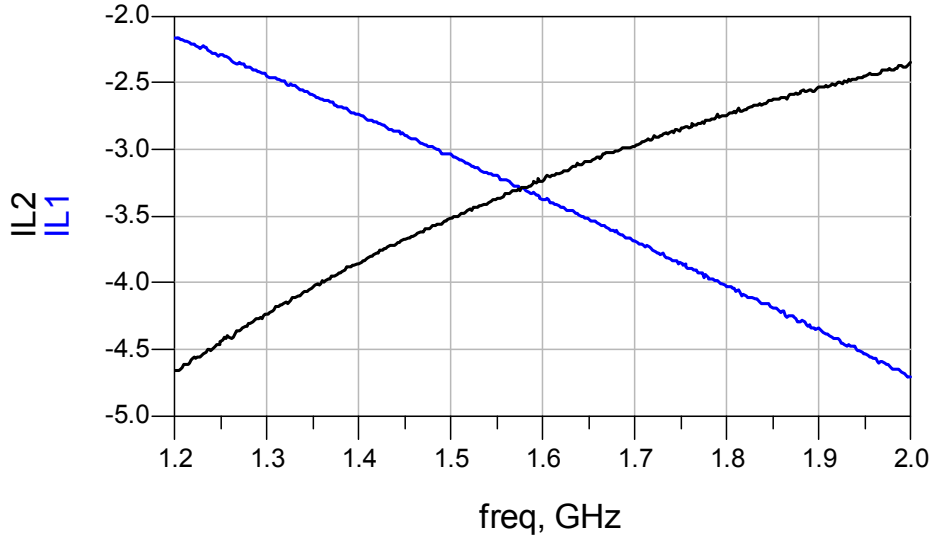

Return Loss & Isolation

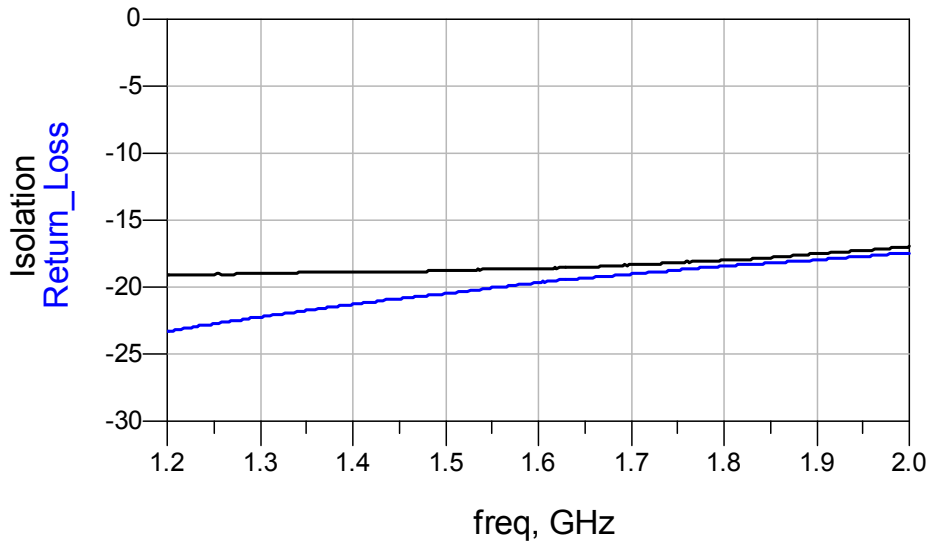

The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions

Mini GNSS 3dB Hybrid Coupler, SMD, EIA 0805 for GPS,
GLONASS, BEIDOU, GALILEO


P/N 1585CH15A0070

Detail Specification: 3/29/2019


Page 4 of 5

Electrical Characteristics (T=25 °C)

Phase Balance

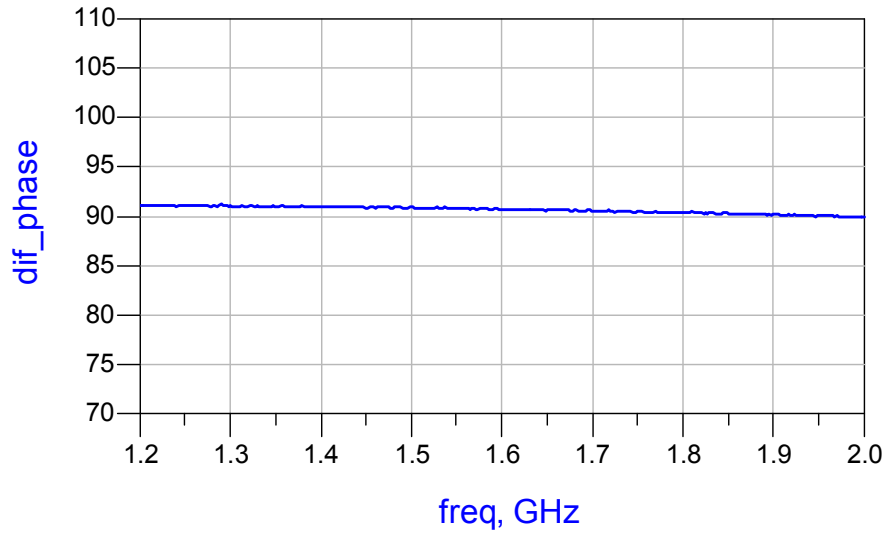

Amplitude Balance

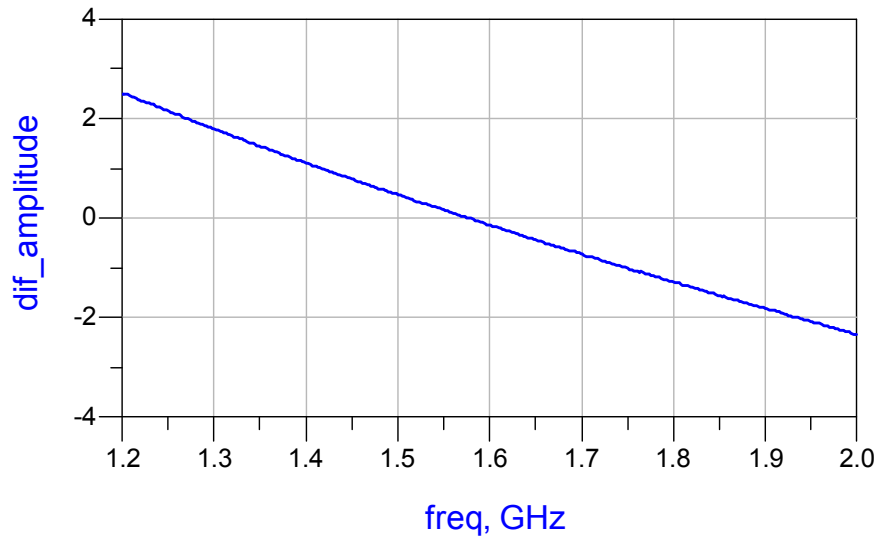

The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions

Mini GNSS 3dB Hybrid Coupler, SMD, EIA 0805 for GPS,
GLONASS, BEIDOU, GALILEO

P/N 1585CH15A0070

Detail Specification: 3/29/2019

Page 5 of 5

RoHS Compliance

<https://www.johansontechnology.com/rohs-compliance>

Packaging information

<https://www.johansontechnology.com/tape-reel-packaging>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

Layout Files, s-parameters and any other technical questions

<https://www.johansontechnology.com/ask-a-question>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Recommended Storage Condition and Max Shelf Life

<https://www.johansontechnology.com/recommended-storage-conditions>

Need a small GNSS chip Antenna?

<https://www.johansontechnology.com/antennas>

Antenna layout and tuning techniques

<https://www.johansontechnology.com/tuning>

Antenna layout review, tuning, and characterization services

<https://www.johansontechnology.com/ipc-antenna-services>

The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 1.0

<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2019 Johanson Technology, Inc. All Rights Reserved