


## 4.7 GHz Band Pass Filter

- 4400 - 5000 MHz passband
- Fit for wireless communication systems
- Low insertion loss
- High out-of-band rejection
- SMD, EIA 0603
- RoHS complaint

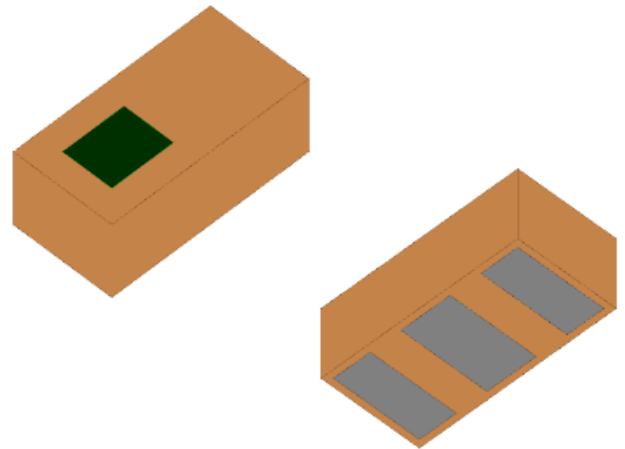

### General Specifications<sup>1 2</sup>

Insertion Loss (dB)	4400 - 5000 MHz	1.15 Typ.	1.5 Max.
Return Loss (dB)	4400 - 5000 MHz	19 Typ.	10 Min.
Attenuation (dB)	400- 915 MHz	46 Typ.	35 Min.
	925 - 2485 MHz	43 Typ.	30 Min.
	2485 - 3600 MHz	31 Typ.	20 Min.
	5850 - 6100 MHz	22 Typ.	7 Min.
	6100 - 6980 MHz	21 Typ.	15 Min.
	8800 - 10000 MHz	32 Typ.	25 Min.
	13200 - 15000 MHz	39 Typ.	20 Min.

### Maximum Ratings


Power Capacity (W)	3 Max. (CW)
Operating Temperature (°C)	-40 to +85
Recommended Storage Conditions post-installation (°C)	-40 to +85
Recommended Storage Conditions and Period for Unused T&R Product	45% - 75% RH +5 to +35 °C 18 Months Max.

<sup>1</sup> Typical value represents average measurement at 25°C. Min./Max. values represent measurements over specified operating temperature.

<sup>2</sup> General specifications measured on Johanson's evaluation board P/N 4700BP14C0600001CE1.

**Mechanical Dimensions**


	Inches			Millimeters		
<b>L</b>	0.063	±	0.004	1.60	±	0.10
<b>W</b>	0.031	±	0.004	0.80	±	0.10
<b>T</b>	0.014		Max.	0.35		Max.
<b>a</b>	0.012	±	0.004	0.30	±	0.10
<b>b</b>	0.016	±	0.004	0.40	±	0.10
<b>c</b>	0.024	±	0.004	0.60	±	0.10
<b>d</b>	0.028	±	0.004	0.70	±	0.10

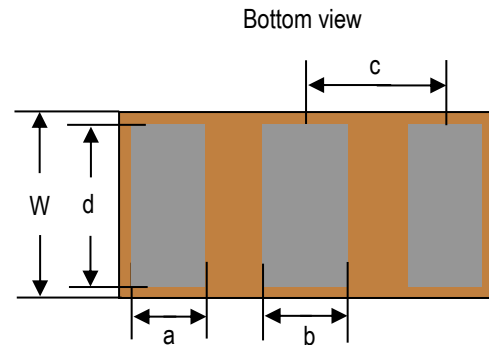

Side view



Top view

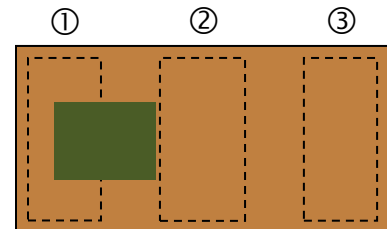

**Terminal Configuration<sup>3</sup>**


Pin Number	Function
1	INPUT/OUTPUT
2	GND
3	INPUT/OUTPUT

<sup>3</sup> The termination type is Nickel Tin. Go to <https://www.johansontechnology.com/ipcsoldering-profile> for Typical Soldering Profile.






**Recommended PCB Layout**

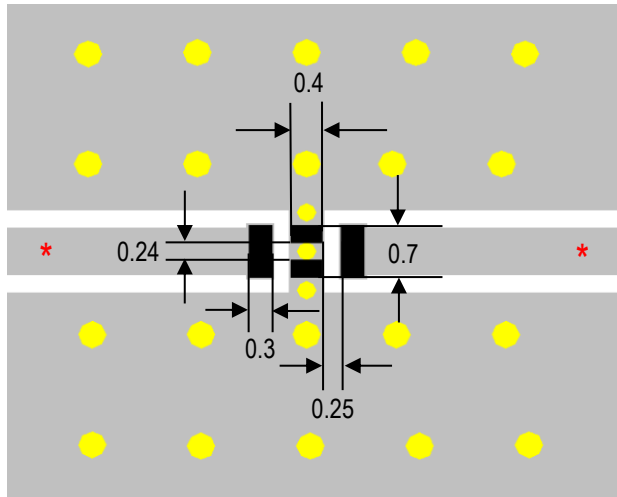Note: Mount device with colored mark facing up.




Units in mm

-  Solder Resist
-  Land
-  Through-hole ( $\phi$  0.3, 0.23)

\* Transmission line width should be designed to match 50 $\Omega$  characteristic impedance, depending on PCB material and thickness.


If you'd like the CAD PCB layout or have any questions, contact our application engineers at <https://www.johansontechnology.com/ask-a-question>

**Measuring Diagram**

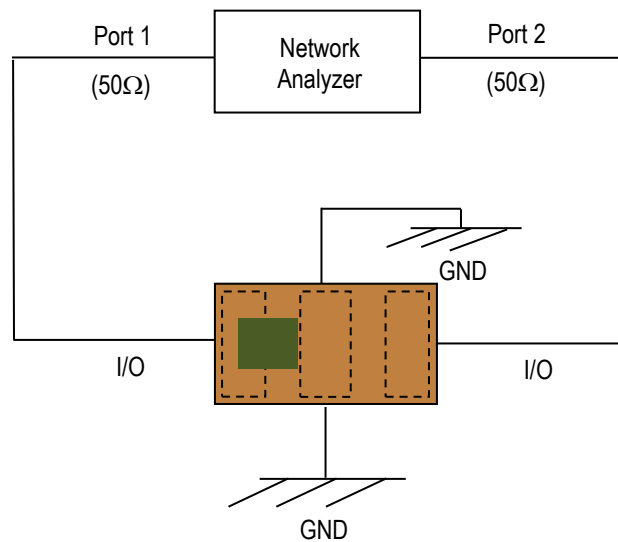

**RF Measurement (T = 25°C)**


**Insertion Loss, Return Loss and Attenuation**

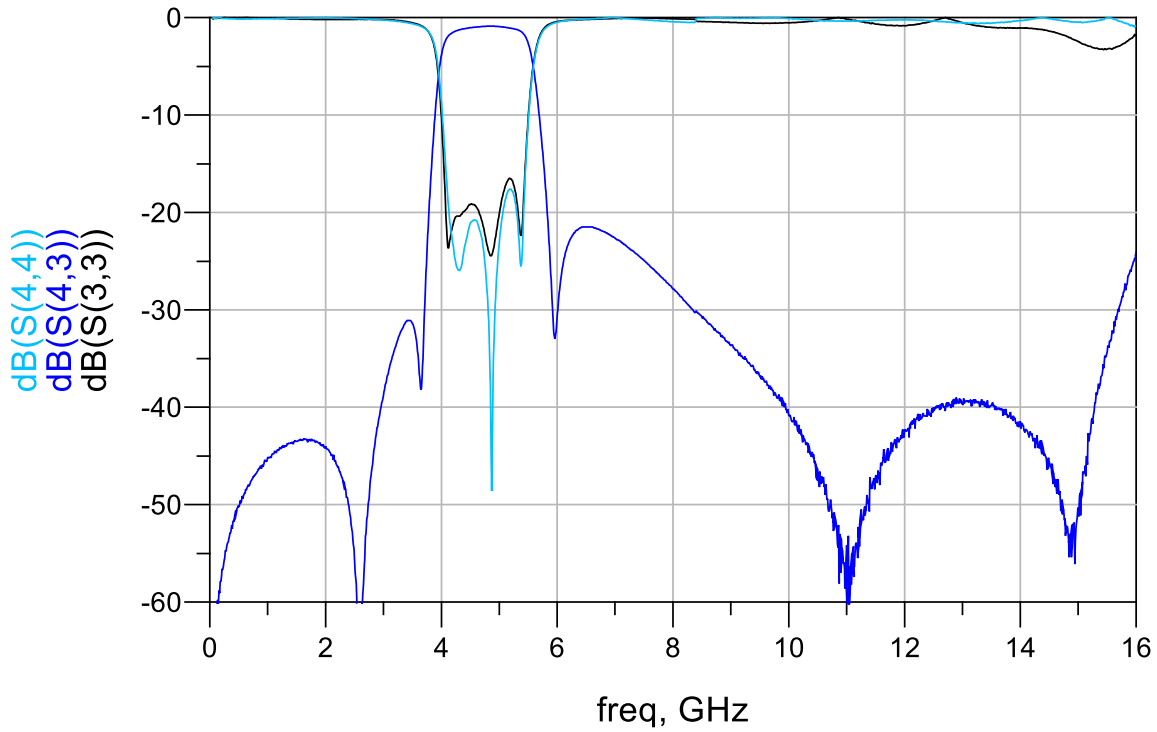

S-parameters, layout file, and complimentary design review are available upon request. Contact our application engineers at <https://www.johansontechnology.com/ask-a-question>


**Tape and Reel Specification (Units in mm)**

**Tape Dimensions**

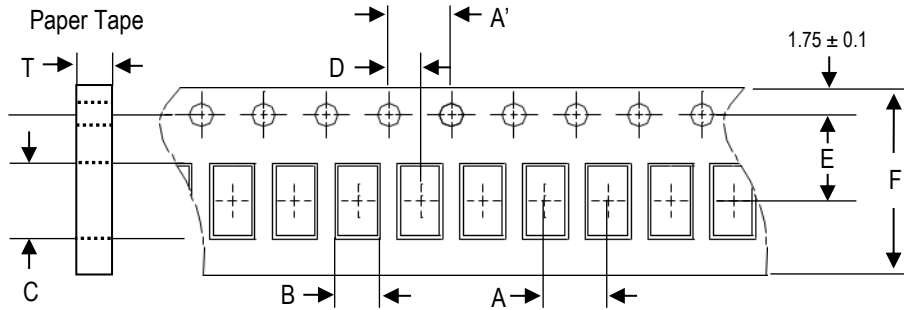


A	A'	B	C	D	E	F	T	Quantity/reel	Tape material
4.0 ±0.1	4.0 ±0.1	0.95 ±0.1	1.80 ±0.1	2.0 ±0.1	3.5 ±0.1	8.0 ±0.1	0.60 ±0.03	4,000 pcs.	Paper

**Reel Dimensions**

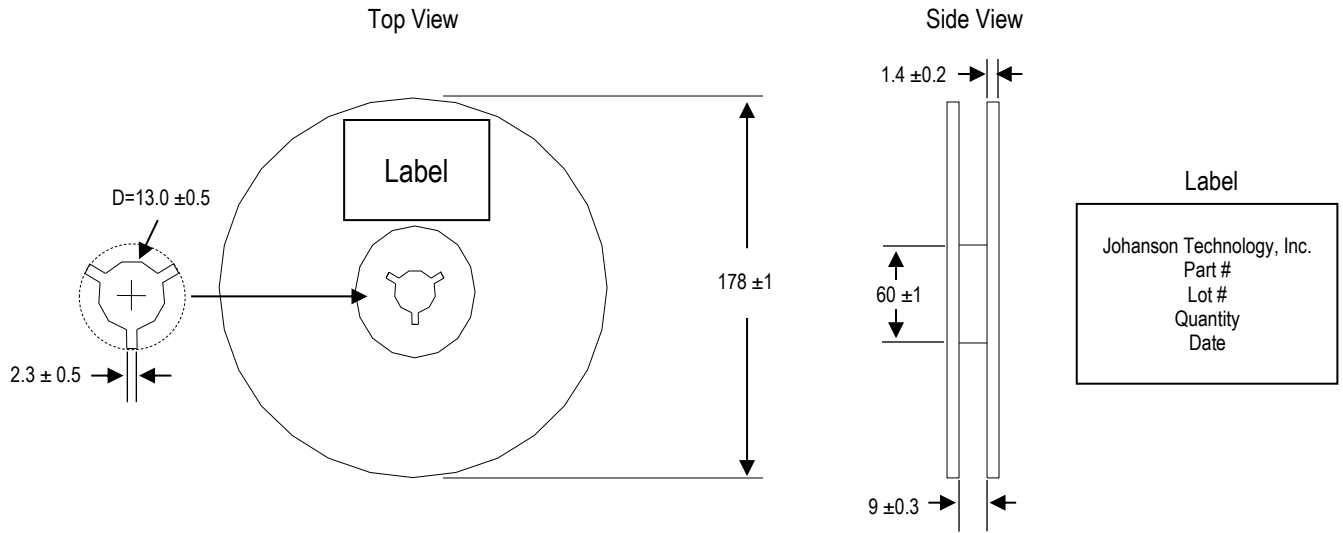

**Leader and Trailer Dimensions**

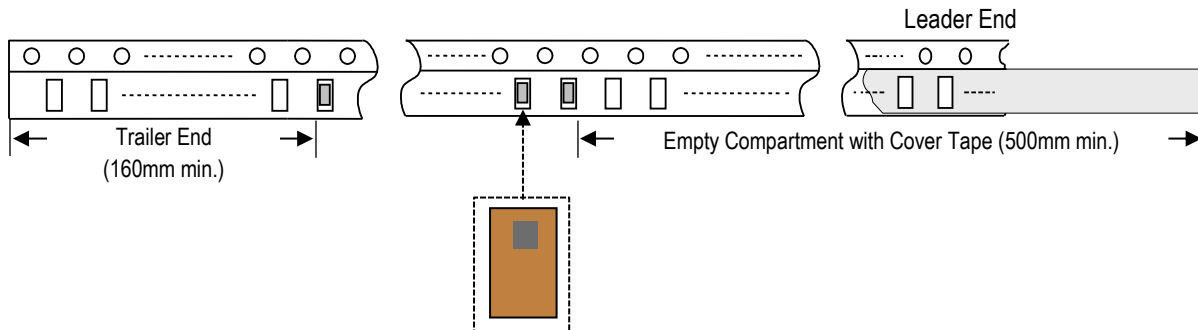

**Orderable Part Number**

Packaging Style	Part Number	Termination
Bulk (loose pcs.)	4700BP14C0600001B	Nickel Tin
T & R (7" Reel Paper Tape)	4700BP14C0600001T (Qty: 4,000 pcs./reel)	
Evaluation Board with 2 SMA Connectors	4700BP14C0600001CE1	

**Important Links**

[4700BP14C0600001T Product Page](#)

[More Band Pass Filters](#)

[Antenna Tuning, Optimization, and Validation Services](#)

[Soldering Information](#)

[MSL Information](#)

[Packaging Information](#)

[Recommended Storage Condition and Max Shelf Life](#)

[RoHS Compliance](#)

**Johanson Technology, Inc. reserves the right to make design changes without notice.**

**All sales are subject to Johanson Technology, Inc. terms and conditions.**