


5.4 GHz Band Pass Filter

- 4900 - 5950 MHz passband
- Fit for wireless communication systems
- Low insertion loss
- High out-of-band rejection
- SMD, EIA 0805
- RoHS complaint

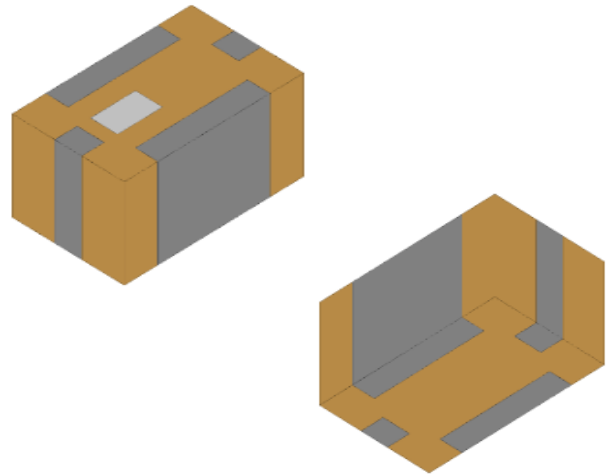

General Specifications^{1 2}

Insertion Loss (dB)	4900 - 5950 MHz	2.0 Max.
Return Loss (dB)	4900 - 5950 MHz	9 Min.
Attenuation (dB)	1280 - 3300 MHz	40 Min.
	3300 - 4000 MHz	25 Min.
	4375 - 4465 MHz	7 Min.
	7300 - 8930 MHz	14 Min.
	9800 - 11900 MHz	25 Min.

Maximum Ratings

Power Capacity (W)	2 Max. (CW)
Operating Temperature (°C)	-40 to +85
Recommended Storage Conditions post-installation (°C)	-40 to +85
Recommended Storage Conditions and Period for Unused T&R Product ³	45% - 75% RH
	+5 to +35 °C
	18 Months Max.




¹ Typical value represents average measurement at 25°C. Min./Max. values represent measurements over specified operating temperature.

² General specifications measured on Johanson's evaluation board P/N 5425BP15A1050001CE1.

³ 18 months max. in vacuum sealed bag and 1 week after opened. Please keep unused parts in vacuum sealed bags. For more info go to <https://www.johansontechnology.com/tech-notes/silver-leaded-components-soldering-profile>.

Mechanical Dimensions

	Inches			Millimeters		
L	0.079	±	0.006	2.00	±	0.15
W	0.049	±	0.004	1.25	±	0.10
T	0.037	±	0.004	0.95	±	0.10
a	0.051	±	0.006	1.30	±	0.15
b	0.012	±	0.006	0.30	±	0.15
c	0.010	±	0.006	0.25	±	0.15
d	0.014	±	0.006	0.35	±	0.15

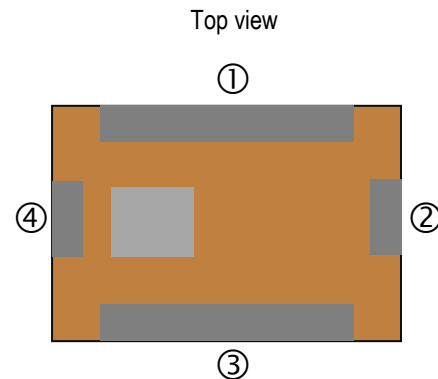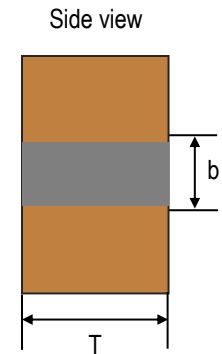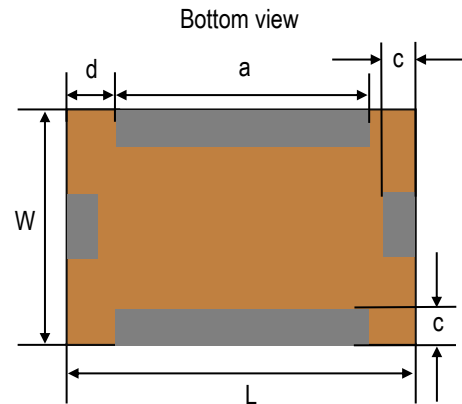

Terminal Configuration⁴


Pin Number	Function
1	GND
2	INPUT/OUTPUT
3	GND
4	INPUT/OUTPUT

⁴ The termination type is Silver. Go to <https://www.johansontechnology.com/tech-notes/silver-leaded-components-soldering-profile> for Typical Soldering Profile. SAC 305 solder paste recommended.






Recommended PCB Layout

Note: Mount device with colored mark facing up.

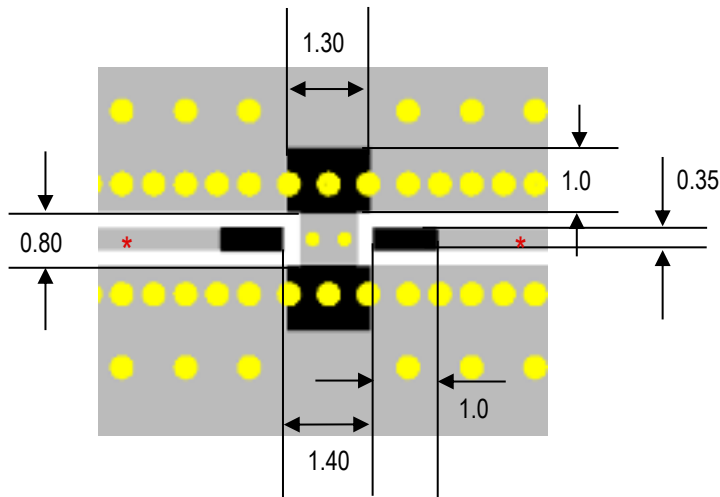


Units in mm

-  Solder Resist
-  Land
-  Through-hole (ϕ 0.35,0.2)

* Transmission line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.


If you'd like the CAD PCB layout or have any questions, contact our application engineers at <https://www.johansontechnology.com/ask-a-question>

Measuring Diagram

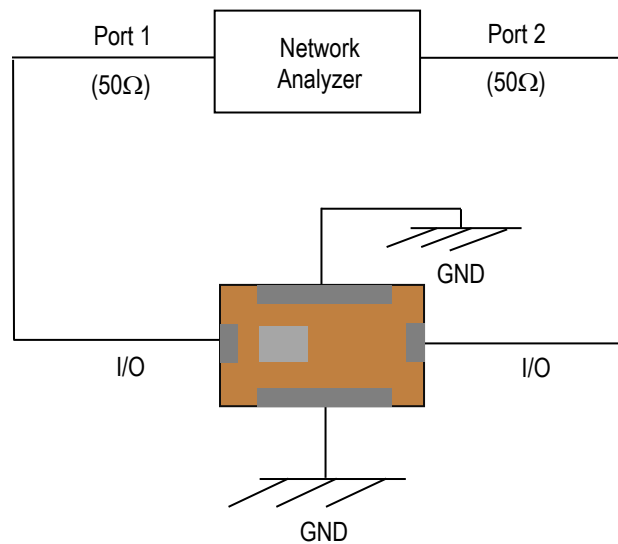

RF Measurement (T = 25°C)


Insertion Loss, Return Loss and Attenuation

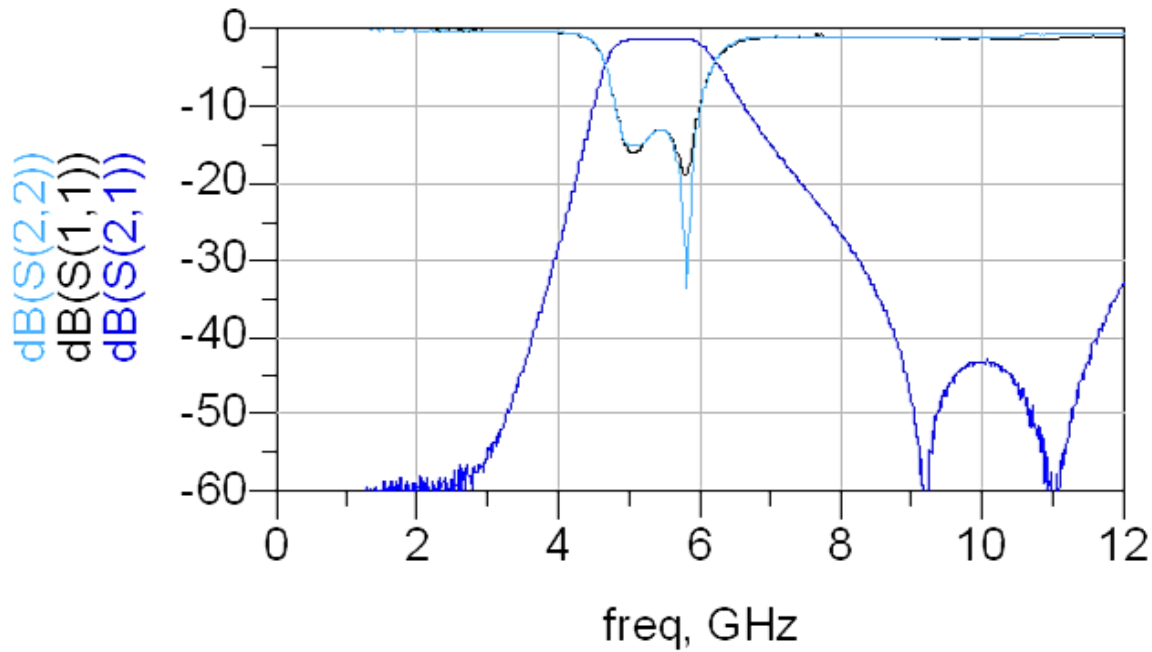

S-parameters, layout file, and complimentary design review are available upon request. Contact our application engineers at <https://www.johansontechnology.com/ask-a-question>


Tape and Reel Specification (Units in mm)

Tape Dimensions

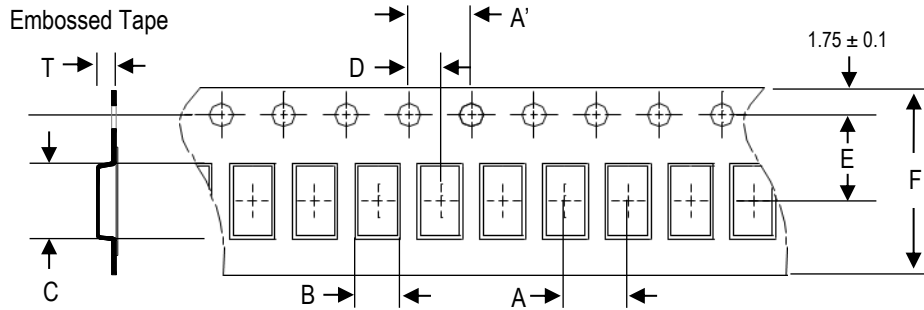


A	A'	B	C	D	E	F	T	Quantity/reel	Tape material
4.0 ±0.1	4.0 ±0.1	1.35 ±0.05	2.15 ±0.05	2.0 ±0.05	3.5 ±0.1	8.0 ±0.1	1.08 ±0.05	4,000 pcs.	Plastic (Embossed)

Reel Dimensions

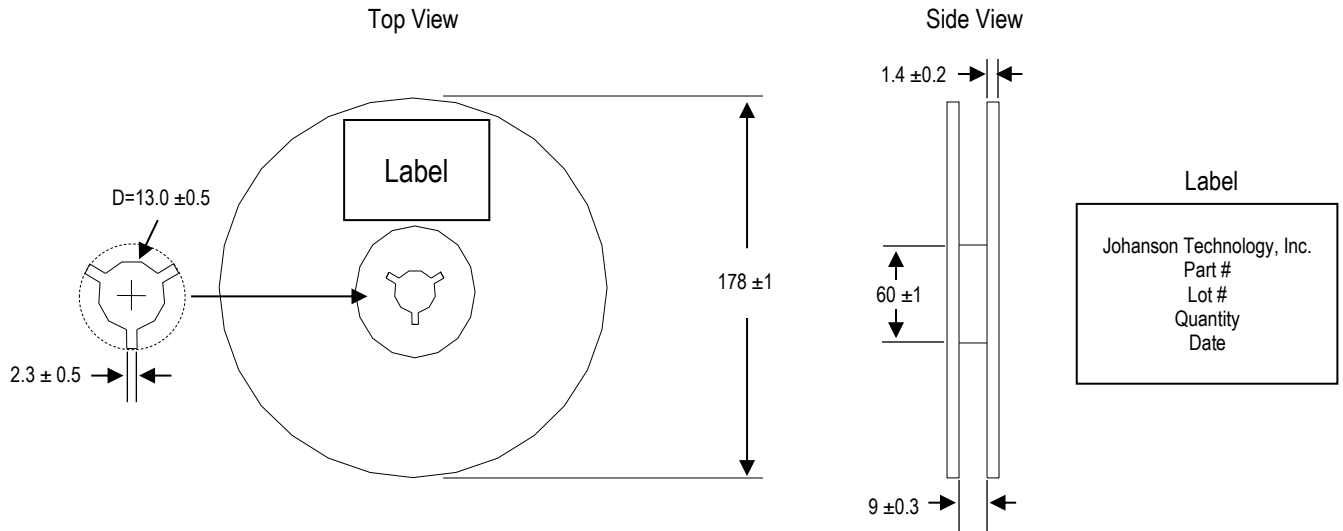

Leader and Trailer Dimensions

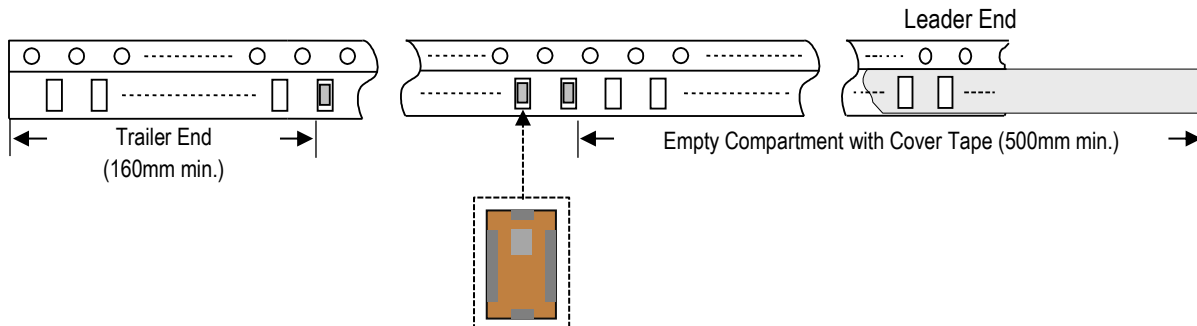

Orderable Part Number

Packaging Style	Part Number	Termination
Bulk (loose pcs.)	5425BP15A1050001B	Silver
T & R (7" Reel Embossed Tape)	5425BP15A1050001E (Qty: 4,000 pcs./reel)	
Evaluation Board with 2 SMA Connectors	5425BP15A1050001CE1	

Important Links

[5425BP15A1050001E Product Page](#)

[More Band Pass Filters](#)

[Antenna Tuning, Optimization, and Validation Services](#)

[Soldering Information](#)

[MSL Information](#)

[Packaging Information](#)

[Recommended Storage Condition and Max Shelf Life](#)

[RoHS Compliance](#)

**Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.**